Wood-Hinged Door with Regular Hinges



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. door opening only: 3'-61/2"
- Min. door opening + side light: 4'
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.

### GLASS


Fixed glass: 1/2" or 3/8"


## HARDWARE OPTIONS


- Levers and mortise lock, locking pull, non-locking pull
- Magnetic catch
- Regular butt hinges or oleodynamic self-closing hinges


All dimensions in mm [inches] unless otherwise stated.

Do not scale from this drawing. This drawing is property of Rolen copyright protected.

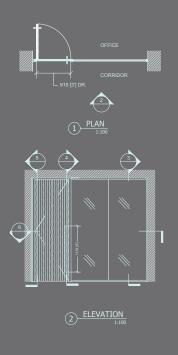

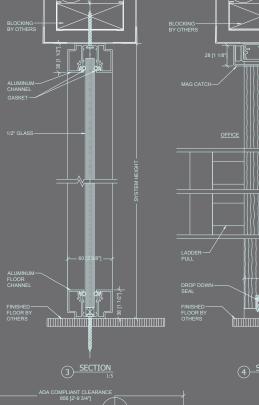

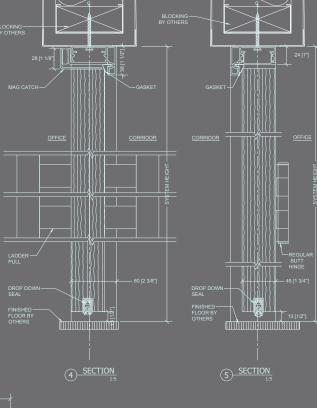


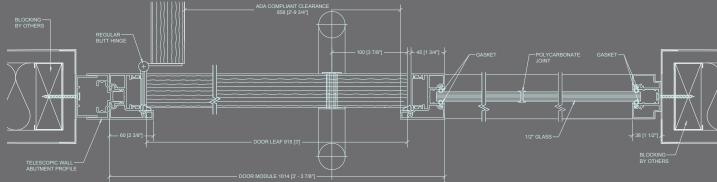



Glass and wood to be client sourced

Frameless-Hinged Door with Regular Hinges



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. door opening only: 3'-6'/
- Min. door opening + side light: 4'
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.


### GLASS

- Fixed glass: 1/2" or 3/8"
- Door glass: 3/8", always tempered

### HARDWARE OPTIONS


- Levers and mortise lock, locking pull, non-locking pull
- Magnetic catch
- Regular butt hinges or oleodynamic self-closing hinges

All dimensions in mm [inches] unless otherwise stated.
Do not scale from this drawing. This drawing is property of
Rolen copyright protected.

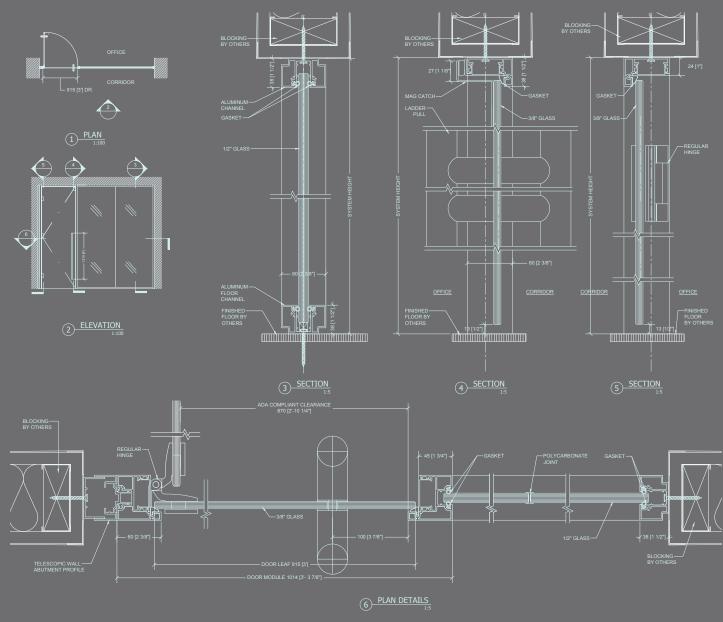



Framed-Hinged Door with Regular Hinges



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. door opening only: 3'-61/2"
- Min. door opening + side light: 4'
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.

### GLASS


Fixed glass: 1/2" or 3/8"

## HARDWARE OPTIONS

- Levers and mortise lock, locking pull, non-locking pull
- Magnetic catch
- Regular butt hinges or oleodynamic self-closing hinges

All dimensions in mm [inches] unless otherwise stated.

Do not scale from this drawing. This drawing is property of Rolen copyright protected.

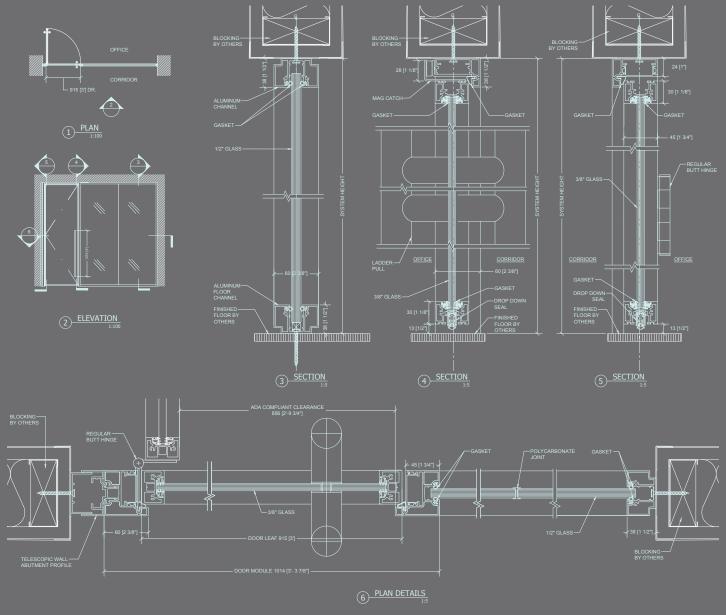



Frameless-Sliding Door



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. door opening: 6'-6'/:
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.

### GLASS


- Fixed glass: 1/2" or 3/8"
- Door glass: <sup>3</sup>/<sub>8</sub>" or <sup>1</sup>/<sub>2</sub>", always tempered

### HARDWARE OPTIONS

Locking pull, non-locking pull

All dimensions in mm [inches] unless otherwise stated.

Do not scale from this drawing. This drawing is property of Rolen copyright protected.

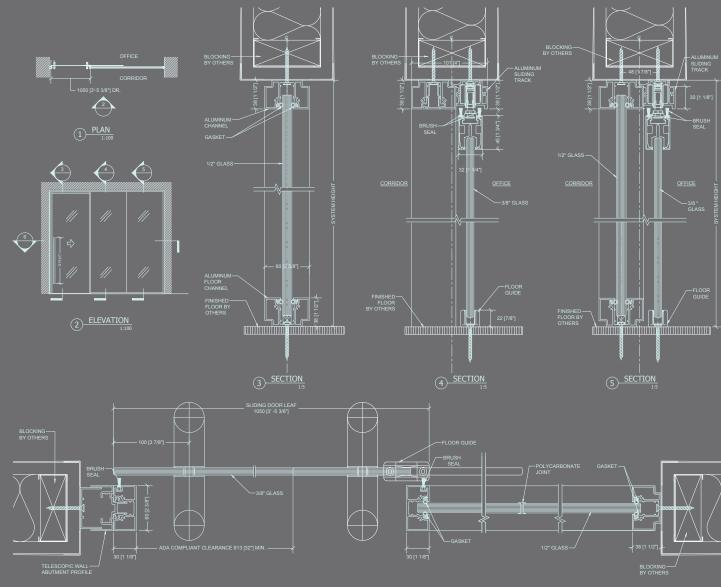



Framed-Sliding Door



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. door opening: 6'-61/2"
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.


### GLASS

- Fixed glass: 1/2" or 3/8"
- Door glass: 3/8" or 1/4" monolithic, always tempered

### HARDWARE OPTIONS

Locking pull, non-locking pull


All dimensions in mm [inches] unless otherwise stated. Do not scale from this drawing. This drawing is property of Rolen copyright protected.

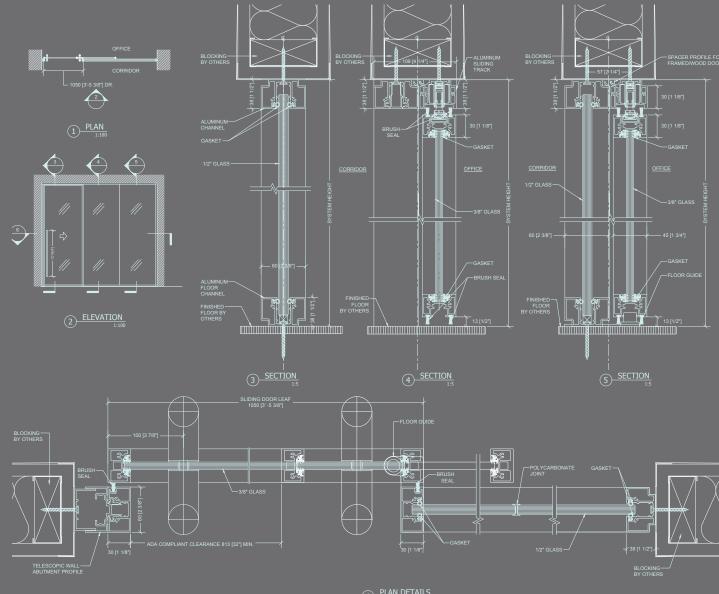



# SL01

Wood-Sliding Door



- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. opening door: 6'-6'/2
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Rolen systems meet drywall.
   See details.

### GLASS

• Fixed glass: 1/2" or 3/8"

### HARDWARE OPTIONS

• Locking pull, non-locking pull

All dimensions in mm [inches] unless otherwise stated.
Do not scale from this drawing. This drawing is property of
Rolen copyright protected.

